

MINISFORUM

New Gen Mini Workstation Series

Copyright © 2025-2026 Micro Computer (HK) Tech Limited.

1 Disclaimer And Safety Instructions

• Disclaimer

1. Thank you for purchasing MS-01SE product.
2. The contents mentioned in this disclaimer are related to your safety, legal rights and responsibilities. Please pay attention to any warnings, cautions and attention signs on the instructions and product labels, and install according to the instructions in the instructions.
3. The product is relatively complex, and users need to have basic hands-on installation skills and safety knowledge. You should be careful during installation.
4. Before using this product, please read the instructions carefully to ensure that the product can be set up correctly. Failure to follow the instructions, warnings, cautions, and attention signs may damage the product or data, and may result in personal or property injury or loss.
5. Once you use this product, you are deemed to have carefully read the content requirements of the disclaimer, warning, caution, and attention signs, understood and accepted all the contents. You promise to take full responsibility for the consequences of using this product. You promise to use this product only for legitimate purposes and agree to this statement and any policies and guidelines formulated by MINISFORUM.
6. In addition to the warranty terms, MINISFORUM is not legally responsible for damage or injury caused directly or indirectly by using this product, especially those caused by failure to operate in accordance with safety guidelines. Users should follow the instructions mentioned in this statement and all safety guidelines.
7. The final interpretation right of this statement belongs to MINISFORUM.

• Safety Precautions

- ⚠ Warning: All M.2 solid-state drive slots only support SSDs with the NVME protocol and do not support SATA protocol. If you insert an SSD with the SATA protocol incorrectly, your SSD may be damaged.
- ⚠ Caution: When removing the PCIE expansion card, please make sure that your fingers are not between the PCIE expansion card and the casing, otherwise your fingers may be pinched.
- ⚠ Attention: When you insert a high-power PCIE expansion card such as a graphics card, please purchase and use a 19V-240W power adapter separately. Otherwise, abnormal shutdown may occur.

• Tips for Use

1. Dust, moisture and drastic temperature changes will affect the product life, so please try to avoid placing the product in these places.
2. The suitable temperature for the MINI PC and accessories is 0°C ~ 35°C.
3. Before you using this product, make sure you leave enough space around the device for ventilation. Please don't block or cover these openings. Never insert objects of any kind into the ventilation openings.
4. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.
5. When you use the power extension cords, the total current of all connected products should be within the rated current of cables, ensuring stable operation.

• Maintenance Guideline

1. Do not step on the power cord or put anything on your Mini PC.
2. Do not spill water or any other liquid over this product.
3. There's still some current passing through even when the system is off. To avoid severe damage caused by possible electric shock, plug out all power cables from sockets temporarily before cleaning or moving this product.
4. If you encounter the technical problems with the product unplug the power cord and contact a qualified service technician or your retailer.

• FAQ

1. The start-up speed may be slow in the following situations: unexpected restart, BIOS reset, memory bank replacement, and SSD replacement. Generally speaking, the start-up speed will return to normal after one successful power-on and power-off process.
2. The core graphics card will occupy a part of the memory as GPU-specific memory.


2 Conventions Used In This Manual

Note: --- This message contains additional instructions for this item.


Important! --- This information contains instructions that must be followed.

Warning! --- This message contains information about user safety and product safety.

Package Contents




MINI PC




Ac Power Adapter */



Power Cord */



HDMI® Cable */



SSD Heatsink */




User Manual */

Note:

* The power adapter and other accessories included in the box will vary depending on the model parameter or area purchased.

3 Getting To Know Your Mini PC

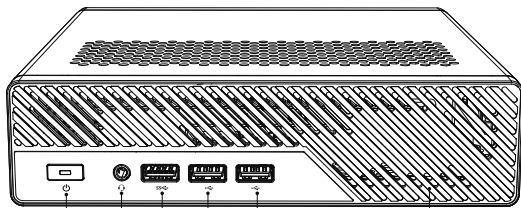


Power Button 01

3.5mm Combo Jack 02

USB3.2 Port 03

USB2.0 Port 04

Air Vent 05

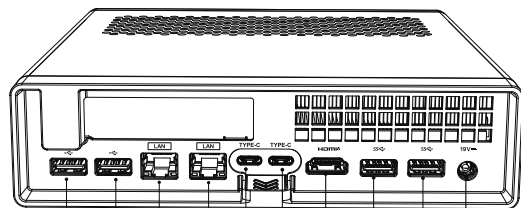

USB2.0 Port 04

RJ-45 LAN Port 06

USB4 Type-C Port 07

HDMI® Port 08

USB3.2 Gen2 Port 09

Power Input 10

Interface

01 Power Button

The power button allows you to turn the Mini PC on /off. You can press the power button to put your Mini PC to sleep mode or press it for 10 seconds to force shutdown your Mini PC.

02 3.5mm Combo Jack

This connector is used to connect audio output signals to a power amplifier or headphones. You can also use it to connect an external microphone or output signals from audio equipment.

03 USB3.2 Port

USB3.2 (Universal Serial Bus) port provides a transfer rate of up to 5 Gbit/s. It can be connected to keyboards, pointing devices, cameras, hard disks, printers and scanners.

04 USB2.0 Port

The USB (Universal Serial Bus) port is compatible with USB2.0 or USB1.1 devices such as keyboards, and printers.

05 Air Vent

The air vents allow your Mini PC chassis to expel hot air out.

Important! For optimum heat dissipation and air ventilation, ensure that the air vents are free from obstructions (such as Paper, books, clothes, transmission lines).

06 RJ-45 LAN Port

This RJ-45 network interface supports standard Ethernet cables and can be connected to a local area network. (Transmission speed 2.5Gbps)

07 USB4 Type-C Port

This interface supports USB4 Type-C transmission protocol, with a maximum data transmission rate of 40Gbps. Support Alt DP audio and video output, only support 5V output, support PCIe data transmission, and support Thunderbolt Ethernet.

08 HDMI® Port

The HDMI® port (High-Definition Multimedia interface) is a uncompressed, fully digital audio/video interface that provides a common data connection channel for compatible devices, Which can be used to connect external display devices and televisions.

09 USB3.2 Gen2 Port

USB3.2 Gen2 (Universal Serial Bus) port provides a transfer rate of up to 10 Gbit/s. It can be connected to keyboards, pointing devices, cameras, hard disks, printers and scanners.


10 Power Input

The power adapter can convert AC power to DC power. The converted power provides power to your Mini PC through the power input interface. To avoid damaging your Mini PC, please use the power adapter provided with the product.


Warning! When the power supply is in use, the temperature of the power adapter may rise and become hot. Do not place the power adapter close to your body.

Power adapter: DC 19V


4 Getting Started With Your Mini PC

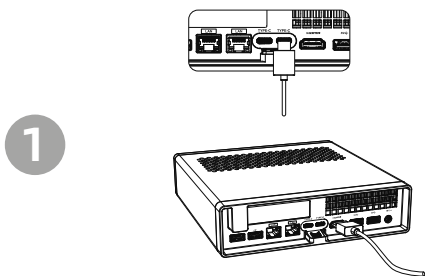


Connect the display to the Mini PC's HDMI® port/USB4 Type-C port.

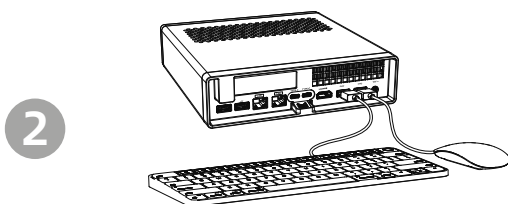

Connect the keyboard and mouse.

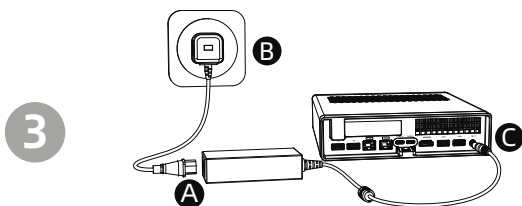

Connect the provided power adapter to your Mini PC.

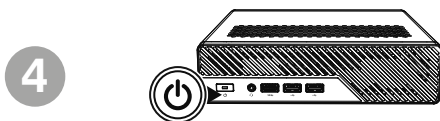

Turn on the power and start the Mini PC.


If the Mini PC is frozen or slow to respond, press and hold the power button at least for 10 seconds to force it shutdown.

To put your Mini PC on Sleep mode, press the Power button once.


Installation Guide

- 1 While pressing the button, pull out the motherboard case.

A




B




DIY DDR

- 2 First remove the radiator, and then insert the memory into the memory slot as shown.

A

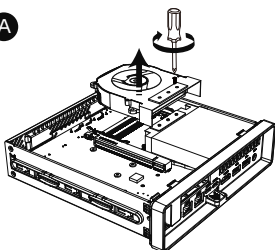

B

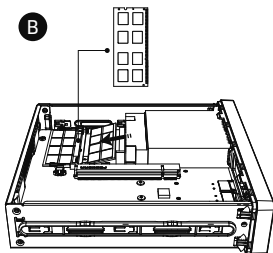


DIY PCIE Expansion Card




PCIE Expansion Card reminder: When using an M.2 hard drive, the switch must be in the M.2 ON position, otherwise the hard drive may be damaged.

- 3 First use a tool to unscrew the positioning clamp screw, press the positioning clamp to take it out, and remove the baffle.

A



B

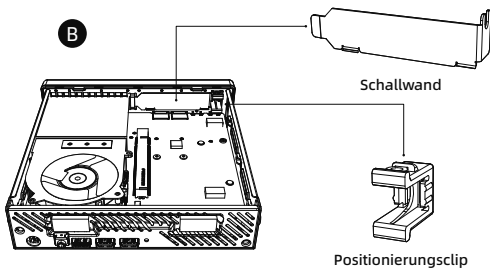


4


Insert the expansion card into the motherboard slot in an oblique direction, and insert the expansion card parallel into the PCIe slot with both hands.

Note: Only half-height single-slot PCIe expansion cards are supported.



C

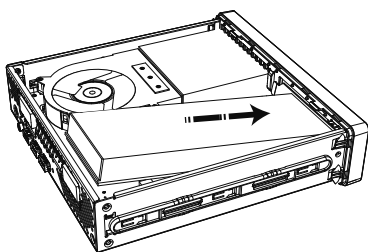


D

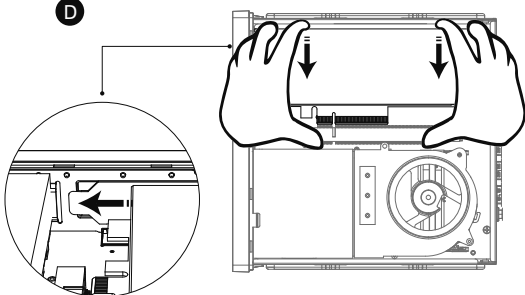

Warn! The correct way to disassemble the expansion card is as shown in the figure, and be careful not to pinch your hands.

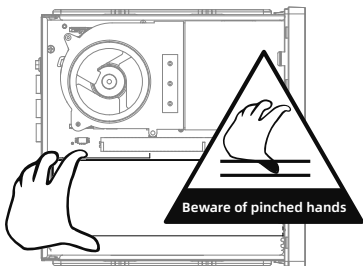


- 5 Turn it over and use tools to remove the heat dissipation bracket.

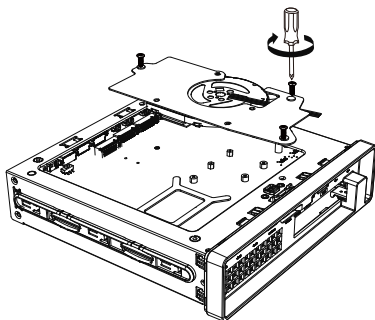


DIY SSD



- 6 Insert the SSD card into the card slot at an angle and secure it with screws.

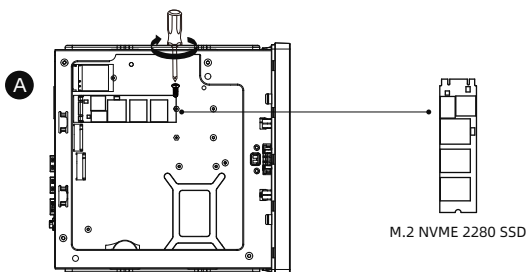

- 7 **Note:** To installation 22110 SSD, you need to use a tool to unscrew the hexagonal screw post first.

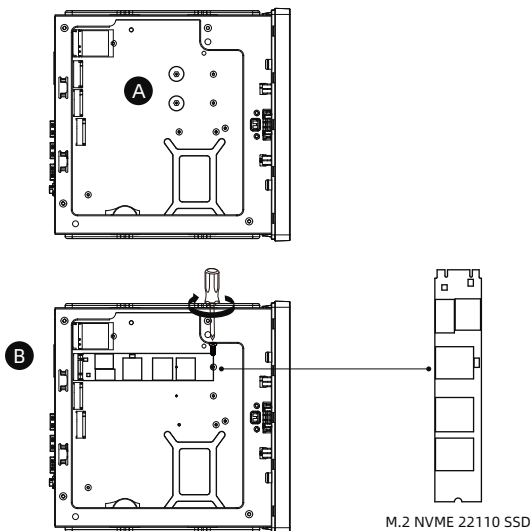

- 8 Re-tighten the screws of the heat dissipation bracket and install the motherboard case into the chassis.

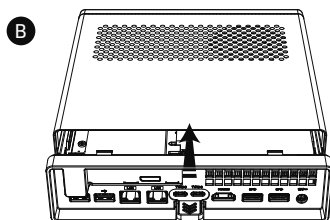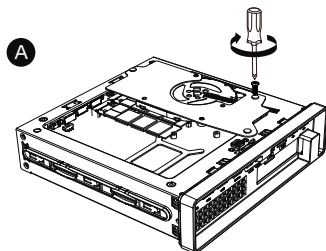

FCC Statement:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

Operations in the 5.15-5.35GHz band are restricted to indoor usage only.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, Human proximity to the antenna shall not be less than 20cm(8 inches)during normal operation.

IC warning:

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- 1) L'appareil ne doit pas produire de brouillage;
- 2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

ce matériel est conforme aux limites d'exposition aux rayonnements rf de ic énoncés dans un autre environnement.

ce matériel doit être installé et exploité à une distance minimale de 20 cm entre le radiateur et votre corps.

WARNING

- **INGESTION HAZARD:** This product contains a button cell or coin battery.
- **DEATH** or serious injury can occur if ingested.
- A swallowed button cell or coin battery can cause **Internal Chemical Burns** in as little as **2 hours**.
- **KEEP** new and used batteries **OUT OF REACH of CHILDREN**
- **Seek immediate medical attention** if a battery is suspected to be swallowed or inserted inside any part of the body.



- a) The statement "Remove and immediately recycle or dispose of used batteries according to local regulations and keep away from children. Do NOT dispose of batteries in household trash or incinerate. "
- b) The statement "Even used batteries may cause severe injury or death."
- c) The statement "Call a local poison control center for treatment information."
- d) A statement indicating the compatible battery type (e.g., LR44, CR2032).
- e) A statement indicating the nominal battery voltage.
- f) The statement "Non-rechargeable batteries are not to be recharged."
- g) The statement "Do not force discharge, recharge, disassemble, heat above (manufacturer's specified temperature rating) or incinerate. Doing so may result in injury due to venting, leakage or explosion resulting in chemical burns."
- h) Products with non-replaceable button/coin cell batteries shall additionally include a statement indicating the product contains non-replaceable batteries.

MINISFORUM

联系信息

生产商：深圳美高创新科技股份有限公司
网址：<https://www.miniscloud.com>
地址：深圳市龙岗区平湖街道禾花社区富康路6号宝能智创谷B栋
201-203、205-210、218-2、219-222
电话：0755-84659450

售后技术支持

网址：<https://www.minisforum.com/new/support>
电话：400-090-9901

Contact information

Manufacturer：Micro Computer (HK) Tech Limited
Website：<https://www.miniscloud.com>
Address：Unit 1908, 19/F, Tower 2, Grand Central Plaza, 138 Shatin
Rural Committee Road, Shatin, N.T., H.K.
TEL：852-23860910

Online Technical Support

Website：<https://www.minisforum.com/new/support>
Email：support@minisforum.com